




Telog Optional Antenna Installation and Specification Information

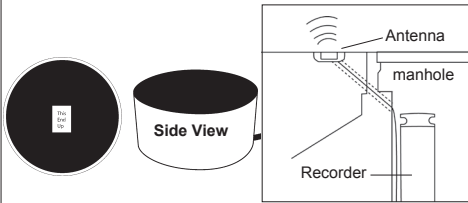


Part Number: A-CBA-TNCSS burial antenna
Installation: In the road surface and is typically used for long term installations.
Type: Annular slot antenna
Connector: TNC, stainless steel
Cable length: 10'
Size: 4" in diameter, 1 3/4" high
Gain: 2dB
Frequency range: 824 – 896 Mhz

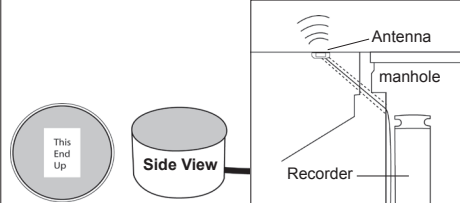


Part Number: A-CBA19-TNCSS burial antenna
Installation: In the road surface and is typically used for long term installations.
Type: Annular slot antenna
Connector: TNC, stainless steel
Cable length: 10'
Size: 2" in diameter, 1" high
Gain: 2dB
Frequency range: 1850 – 1990 Mhz

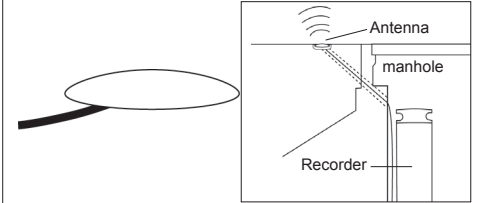


Part Number: A-LPBA low profile burial antenna
Installation: In the road surface and is typically used for long term installations.
Type: Quad band
Connector: TNC SS coax
Cable length: 10'
Size: 4" in diameter, 3/4" high
Gain: 0 dBi Average
Frequency range: 824-896, 880-960, 1850-1990, 1710-1880 Mhz

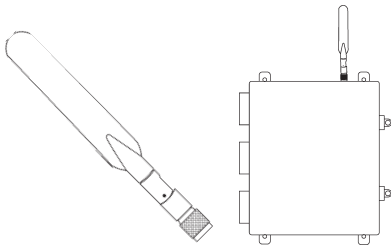


Part Number: A-EMA enclosure mount antenna
Installation: On an enclosure
Type: Quad band, omnidirectional swivel antenna
Connector: TNC, nickel plated brass
Size: 6 1/2" high
Gain: 2dB
Frequency range: 824 – 960 Mhz & 1710 – 2170 Mhz

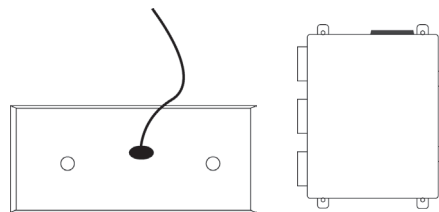

Part Number: A-LPA low profile antenna
Installation: On an enclosure or steel vault door
Type: Quad band antenna
Connector: TNC, nickel plated brass
Cable length: 17'
Size: 5" in length, 2 1/2" wide, 1/2" high
Gain: 0dB
Frequency range: 824 – 960 Mhz & 1710 – 2170 Mhz

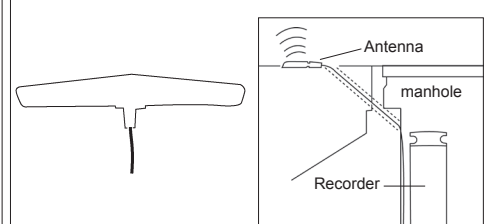

Part Number: A-MWA mini-wing antenna
Installation: On the road surface or manhole cover; typically used for temporary installations.
Type: Quad band antenna
Connector: TNC, nickel plated brass
Cable length: 10'
Size: 5" in Length, 3/4" wide, 3/8" high
Gain: 0dB
Frequency range: 824 – 960 Mhz & 1710 – 2170 Mhz



Part Number: A-PMA pole mount antenna
Installation: On a pole
Type: Dual band, omnidirectional antenna
Connector: TNC, nickel plated brass
Cable length: 15'
Mounting: Pole mounting kit included
Size: 14" tall
Gain: 0dB
Frequency range: 824 – 896 Mhz
Gain: 2dB
Frequency: 1850 – 1990 Mhz



830 Canning Parkway, Victor, NY 14564-8940, USA
 Phone: 585.742.3000 • Fax: 585.742.3006
 E-mail: TelogSales@telog.com • www.telog.com

Specifications within this document are subject to change without notification.
 Telog is a registered trademark Telog Instruments, Inc.