



# Telog WL-41

## LoRa WIRELESS, BATTERY-POWERED LEVEL RECORDER

### WATER LEVEL MONITORING/ ALARMING

Water and wastewater utilities are facing significant challenges due to water shortages, storm events and flooding, expanding customer service expectations and increasing environmental regulations. Budget constraints mean that utilities must do “more with less” and operate their networks more effectively and efficiently.

For utilities to meet these requirements they need visibility in near real time, of how their network is performing and responding to the demands placed upon it. In the past, the cost was prohibitive to deploy monitoring equipment to the scale required to give operations staff the required insight. But that is now possible with the Telog 41-Series.

As part of a smart water infrastructure, Telog's 41 Series is designed to enable utilities to monitor real-time operations, assess the condition of assets, repair leaks to reduce non-revenue water (NRW) and manage critical infrastructure. The sensors provide a cost effective solution to address the information deficit in water collection and distribution systems.

The Telog WL-41 Water Level Recorder establishes a new standard in low power, low cost IoT communication sensors for monitoring and alarming remote water system levels. The Telog WL-41 is a versatile instrument intended to monitor water levels (e.g. underground aquifers, reservoir or water tower levels). It is available with a choice of water level ranges, from 1 foot to 500 feet.

Connected to Telog Cloud or on premise software applications, the Telog WL-41 may be configured to report its data on a schedule (5 or 15 minutes, hourly, etc.) and/or on alarm (e.g. in response to a high or low or level threshold exceedance condition). The recorder can be programmed to sample the water level sensor up to once per second and transmit the data statistics as per the schedule.

The Telog WL-41 uses a low power, long range LoRaWAN™ communication protocol which is an industry standard for the emerging Internet of Things (IoT). The modem, antenna, pressure signal conditioning, data recorder and battery are integrated into a small, environmentally rugged package making the Telog WL-41 easy to install and put into service.

Making data calls every 15 minutes, the recorder can operate an average of 5 years on one user replaceable 'C' cell Lithium battery. This significantly reduces the cost of ownership as the need to visit remote sites for frequent battery changes is removed.

The Telog WL-41 is compatible with all Telog software applications, including Trimble Unity, Telog Enterprise and Telogers for Windows application software. This ensures that utilities have a complete solution addressing all their remote monitoring needs across their operations, delivered in a manner that suits each individual utility's operations and IT needs.

### Applications

#### Water Level

- ▶ Unattended in-well applications monitoring
- ▶ Surface reservoir level monitoring
- ▶ CSO/SSO Monitoring

#### Tank Level

- ▶ Water, chemical, fuel level and transaction monitoring
- ▶ Inventory management
- ▶ Refill scheduling

### Features

- ▶ Wireless communication
- ▶ Alarm notification
- ▶ Time stamped events
- ▶ Records level and duration of events
- ▶ LoRaWAN communication protocol
- ▶ Integral antenna
- ▶ 5 year battery life with 15 minute transmits
- ▶ User replaceable 'C' cell Lithium battery

#### TELOG 41 SERIES


Telog PR-41 - Pressure Recorder

**Telog WL-41 - Level Recorder**

Telog RG-41 - Rain Gauge Sensor

Telog MTU-41 - Meter Telemetry Unit

Telog PE-41 - Pulse / Event Recorder

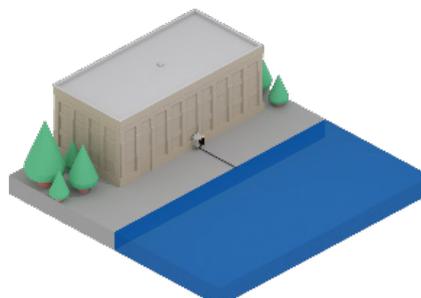

Reservoir Level Monitoring

# Telog WL-41 LoRa PROTOCOL WATER LEVEL RECORDER



## RECORDER MODEL: Telog WL-41

Type	Single channel pressure recorder with external sensor
Recording	
Sample rate	1 per second to 1 per 8 hours; user programmable
Clock accuracy	0.01%
Memory size	128 kbytes; 28,000 data values
Storage method	Wrap around (first-in; first-out)
Communication:	
Sensor Interface	I <sup>2</sup> C serial protocol
Wireless	
Technology	LoRaWAN bi-directional class A protocol
Security	AES128 keys for encryption and authorization
Output Power	18.5 dbm maximum
Frequency	915 MHz (North America LoRa band)
Antenna	Integrated Antenna   External antenna optional
Battery	Factory installed single 3.6V Lithium 'C' cell Soft LSH 14 or equal, user replaceable
Battery Life	5 years nominal @ 15 minute transmits @ medium to excellent signal strength
Enclosure	
Size	4.70" L x 3.2" W x 2.2" H
Weight	1.5 lbs. (includes sensor + 15' cable)
Material	Polycarbonate
Environmental	
Temperature	-40 to 160°F
Rating	NEMA 4x (IP67)

## SENSOR MODEL: Telog PT-DS1

Type	Strain gauge pressure sensor
Interface	I <sup>2</sup> C serial protocol
Range	Selectable 1, 2.5, 5, 10, 15, 30, 50, 100, 200, 300, 500 PSI (gauge or absolute)
Accuracy	0.1% of full scale Includes effects of non-linearity, temperature and repeatability
Temperature Range	-40°F to 185°F (freezing water will damage sensor)
Temperature Effect	± 0.01%/°F (32 to 90°F)
Pressure Over Range	2x full scale with negligible calibration change
Proof pressure	4x full scale
Physical	
Pressure fitting	1/4" NPT male with depth nose cone
Environmental	Submersible to NEMA 6P (IP-68)
Sensor length	5"
Sensor diameter	1.0"
Sensor body	316 stainless steel
Cable	Vented Polyurethane 0.275" diameter
Cable weight	0.027 lbs./ft

## REQUIRED SOFTWARE & OPTIONS

S-3PC	Telogers for Windows®
S-3EP	Telog® Enterprise
TW-UNITY	Trimble Unity



Specifications within this brochure are subject to change without notification.

© 2020, Telog, A Trimble Company. All rights reserved. Telog is a registered trademark and Telogers is a trademark of Telog, A Trimble Company. Trimble and the Globe & Triangle logo are trademarks of Trimble Inc., registered in the United States and in other countries. Microsoft and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. LoRa is a registered trademark of Semtech Corporation. All other trademarks are the property of their respective owners. PN 022544-026 (10/2020)

**IRVINE OFFICE, CALIFORNIA, USA**  
18500 Von Karman Avenue,  
Suite 260, Irvine, CA 92612  
+1 (949) 892-6120

**CORK OFFICE, IRELAND**  
R.o.W : Trimble Navigation Limited  
NSC Campus, Mahon, Cork  
Ireland  
+353 21 230 9328

**TELOG (ROCHESTER OFFICE),  
NEW YORK, USA**  
830 Canning Parkway  
Victor, New York 14564  
+1 (585) 742-3000

TrimbleWater\_ContactUs@trimble.com  
www.trimblewater.com

